

SERIES 400 PLEATED FILTER



1", 2" & 4"
MERV 8 & 10

STANDARD
AND
HIGH CAPACITY

Ideal for use in
• Commercial/Industrial
• Schools/Universities
• Hotels/Airports



WHY THE SERIES 400?

- 100% synthetic pleated media achieves exceptionally high levels of efficiency
 - Does not rely on electrostatic charge
 - Lowest resistance to air flow available
 - Minimizes energy costs
 - Moisture resistant and will not promote microbial growth
 - Excellent pre-filter for higher efficiency air filters
 - Effectively removes airborne irritants
 - Protects cooling coils & ductwork of HVAC system
- Durable construction optimizes performance
 - Media laminated to metal grid
 - Minimized media fluttering
 - Design helps maintain pleat uniformity
 - Filter pack enclosed in heavy-duty, moisture resistant die-cut frame
 - Will not warp, crack or distort under normal operating conditions



MINIMUM 35% POST CONSUMER CONTENT

Filtration Group

HVAC




SERIES 400 PLEATED FILTER




SERIES 400 PERFORMANCE DATA (fpm)

FILTER DEPTH	MEDIUM VELOCITY	INITIAL RESISTANCE			FINAL RESISTANCE (All Filters)		
		MEDIUM STD CAP	HIGH CAP	HIGH VELOCITY			
1"	300	0.18	0.12	375	0.25	0.17	1.0
2"	375	0.13	0.11	500	0.19	0.17	1.0
4"	500	0.15	0.11	625	0.21	0.17	1.0

INITIAL RESISTANCE (24 X 24 X 2)

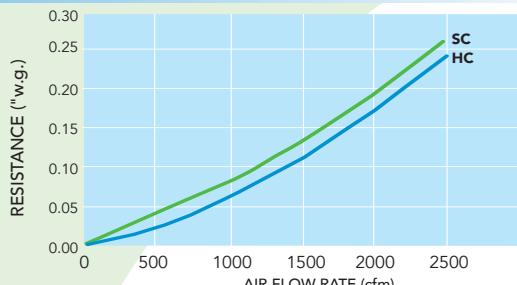

EFFICIENCY PER ASHRAE 52.2 (24 X 24 X 2)

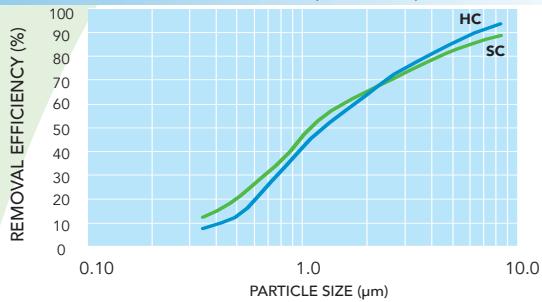

SERIES 400 ENGINEERING SPECIFICATIONS

1.0 General

- 1.1 Filters shall be Aerostar® Series 400 extended surface pleated air filters as manufactured by Filtration Group.
- 1.2 Filters shall be available in standard and high capacity configurations and available in nominal depths of 1", 2", and 4".
- 1.3 Underwriters Laboratories classified to UL 900.
- 1.4 Filters are manufactured by an ISO 9001 registered company.

2.0 Filter Materials of Construction

- 2.1 Media shall be 100% synthetic, mechanical media that does not support microbial growth.
- 2.2 Frame shall be a heavy duty, high strength, moisture resistant paperboard with a cross member design that increases filter rigidity and prevents breaching. Frame shall be made with 100% recycled paperboard with an average of 35% post-consumer content. Frame shall be recyclable.
- 2.3 Filters shall have an expanded metal support grid bonded to the air-exiting side of the filter to maintain pleat uniformity and prevent fluttering. Metal support grid shall be recyclable and contain a significant amount of post-consumer and pre-consumer content.

3.0 Filter Performance

- 3.1 Filters shall be MERV 10 in a high capacity configuration and MERV 8 in a standard capacity configuration when tested in accordance with ASHRAE 52.2-2012 Test Standard.
- 3.2 For initial resistance of filters, see Performance Data chart above.
- 3.3 Filters shall be rated to withstand a continuous operating temperature up to 200°F.
- 3.4 Filters shall have a recommended final resistance of 1.0" w.g.

SERIES 400 DIMENSIONS

PART NUMBER STD CAP HIGH CAP	NOMINAL SIZE*	CFM CAPACITIES	
		MEDIUM (300)	HIGH (375)
10403 10476	8 x 16 x 1	250	325
10404 10477	10 x 10 x 1	200	250
10364 10436	10 x 20 x 1	400	525
10405 10478	10 x 24 x 1	500	625
10406 10479	10 x 25 x 1	525	650
10365 10437	12 x 12 x 1	300	375
10407 10480	12 x 16 x 1	400	500
10366 10438	12 x 20 x 1	500	625
10367 10439	12 x 24 x 1	600	750
10368 10440	12 x 25 x 1	625	775
10369 10441	14 x 20 x 1	575	725
10408 10481	14 x 24 x 1	700	875
10370 10442	14 x 25 x 1	725	900
10371 10443	15 x 20 x 1	625	775
10409 10482	15 x 25 x 1	800	975
10410 10483	16 x 16 x 1	525	650
10372 10444	16 x 20 x 1	650	825
10411 10484	16 x 24 x 1	800	1000
10373 10445	16 x 25 x 1	825	1050
10412 10485	18 x 18 x 1	675	850
10413 10486	18 x 20 x 1	750	925
10414 10487	18 x 22 x 1	825	1025
10415 10488	18 x 24 x 1	900	1125
10374 10446	18 x 25 x 1	925	1175
10375 10447	20 x 20 x 1	825	1050
10416 10489	20 x 24 x 1	1000	1250
10376 10448	20 x 25 x 1	1050	1300
10417 10490	22 x 22 x 1	1000	1250
10377 10449	24 x 24 x 1	1200	1500
10378 10450	25 x 25 x 1	1300	1625
		MEDIUM (375)	HIGH (500)
10418 10491	10 x 10 x 2	250	350
10379 10451	10 x 20 x 2	525	700
10419 10492	12 x 20 x 2	625	825
10380 10452	12 x 24 x 2	750	1000
10381 10453	14 x 20 x 2	725	975
10382 10454	14 x 25 x 2	900	1200
10383 10455	15 x 20 x 2	775	1025
10420 10493	16 x 16 x 2	650	875
10384 10456	16 x 20 x 2	825	1100
10385 10457	16 x 24 x 2	1000	1325
10386 10458	16 x 25 x 2	1050	1400
10421 10494	18 x 22 x 2	1025	1375
10387 10459	18 x 24 x 2	1125	1500
10422 10495	18 x 25 x 2	1175	1550
10388 10460	20 x 20 x 2	1050	1400
10389 10461	20 x 24 x 2	1250	1650
10390 10462	20 x 25 x 2	1300	1750
10391 10463	24 x 24 x 2	1500	2000
10392 10464	25 x 25 x 2	1625	2150
		MEDIUM (500)	HIGH (625)
10393 10465	12 x 24 x 4	1000	1250
10394 10466	16 x 20 x 4	1100	1400
10395 10467	16 x 25 x 4	1400	1750
10396 10468	18 x 24 x 4	1500	1875
10397 10469	20 x 20 x 4	1400	1750
10398 10470	20 x 24 x 4	1650	2100
10399 10471	20 x 25 x 4	1750	2200
10399 10472	24 x 24 x 4	2000	2500
10400 10473	25 x 29 x 4	2525	3150
10401 10474	28 x 30 x 4	2900	3650

*Contact Customer Service for special and actual sizes.

Filtration Group



HVAC

Phone: 877-344-8326 • Fax: 800-518-1162
www.filtrationgroup.com • e-mail: aerostar@filtrationgroup.com
ISO 9001 Registered Company.